



Fluid Sampling Equipment

FS-100 / FS-200

Sample Thief (Bacon Bomb)

The Bacon Bomb is an industrial strength device designed to take fuel samples from the bottom of storage tanks. When the thief strikes the bottom of the tank, a plunger assembly opens to admit the sample. The plunger closes again when the sampler is withdrawn, forming a tight seal. **Samples can be taken at any depth** with the use of a secondary trip line. The thief is equipped with a **plunger locking cam** for tight closure during transport.



FS 2.. Sample Thief (Bacon Bomb)	Model #
16oz (473ml) Plated Brass, 2 3/4" OD, 12 1/32" L, 9 lbs	FS 220
16oz (473ml) Stainless Steel, 2 3/4" OD, 12 1/32" L, 8 lbs	FS 225
8oz (237ml) Plated Brass, 2 5/16" OD, 10 5/32" L, 5 lbs	FS 210
8oz (237ml) Stainless Steel, 2 5/16" OD, 10 5/32" L, 5 lbs	FS 215
4oz (120ml) Plated Brass, 1 7/8" OD, 9 11/16" L, 4 lbs	FS 200
4oz (120ml) Stainless Steel, 1 7/8" OD, 9 11/16" L, 4 lbs	FS 205

Seals for FS 2.. series are Viton O-Rings.

Other models, sizes and materials are available upon request.

We invite your inquires.

Fluid Sampling Pump


Obtains fluid samples from hard to reach spots with flexible 1/4" tubing and the FS 100 Fluid Sampling pump. The durability, simplicity, versatility and. operating ease bring a new level of performance to fluid sampling.

No cross contamination – Fluids can be drawn through tubing (FS 120) directly into sampling bottle (FS 110) without coming into contact with the pump. The pump will stay completely clean. The FS system can be used for fuels, oil, hydraulic fluids, coolant, water, etc.



FS 100 Fluid Sampling Pump	Model #
Small, hand operated, easy to use vacuum pump. To be used with FS 120 tubing and FS 100 sampling bottles Length: 8 1/2" (215mm), Weight: 7oz (200g)	FS 100

FS 110 Sampling bottles	Model #
Sampling bottles 4oz (120ml) bottles with 38mm thread	FS 110

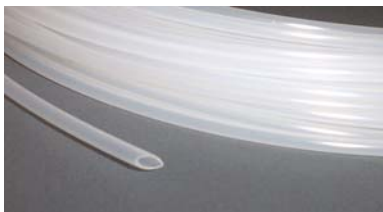

FS 120 Tubing	Model #
Tubing 1/4" clear suction tubing, 100ft long	FS 120

DIESEL FUEL DOCTOR